

# BLIZZARD<sup>®</sup> SNOWPLOWS

**STRAIGHT POWER... PERIOD.**



## Extended Moldboard

All Blizzard straight blade snowplows feature an extended moldboard. This unique construction provides an additional 13 cm of blade that rolls snow farther ahead and to the side when plowing. Now you can move snow faster, saving fuel and reducing wear on the truck and plow.



## Pivot Beam Kickstand

The pivot beam kickstand makes dismounting of your plow easy; just pull the spring-loaded, stainless steel lock pin and the kickstand to the ground. Now, when the Power Hitch™ mechanism releases the plow from the under-carriage and the vehicle backs away, the A-frame is maintained in a "ready position" for mounting.

## Hydraulic Pump & Manifold

Mounted front and center on a rugged A-frame, the pump and manifold system provides fast and reliable power under the most demanding conditions. This compact power package is protected by a durable plastic cover and can pivot forward up to 30 degrees for easy servicing.



## Blizzard Joystick Control

The straight blade snowplows are operated using a Blizzard four-way joystick control. This ergonomic control provides smooth, natural response to every command. The joystick is shipped with a standard Velcro bench mount. An optional window mount system is available for left hand operation or for vehicles with center consoles.



**Importer:**

**OY HILLTIP AB**  
Kauppiaankatu 16  
68600 Pietarsaari  
FINLAND



+358 50 598 3026  
[info@hilltip.com](mailto:info@hilltip.com)  
[www.hilltip.com](http://www.hilltip.com)


**Dealer:**

## PowerHitch™ Mechanism

The exclusive Power Hitch™ mechanism automatically pulls the plow into the undercarriage receiving points using hydraulic power. The safety pin mounting holes are automatically and positively aligned for fast installation. Once the plow is connected, the same hydraulic cylinder that facilitates the mounting procedure is used to raise and lower the plow.



**The innovative style of the Blizzard straight blade represents the beginning of a new era in design.**

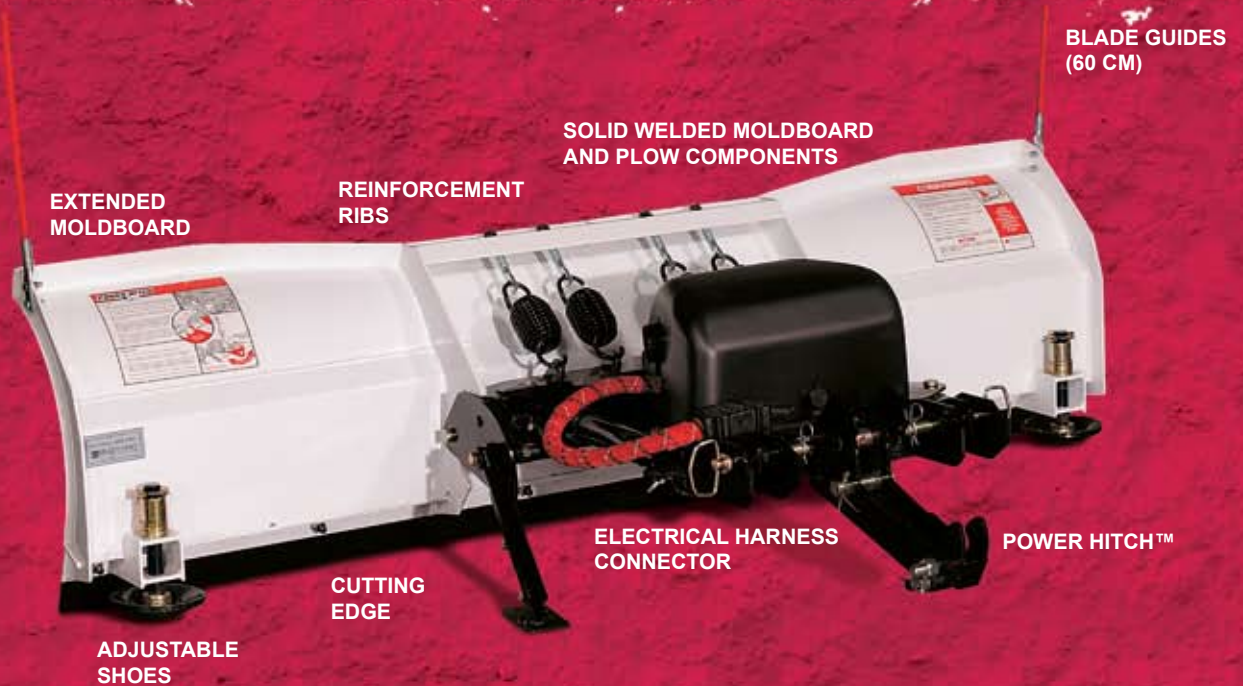

<b>SPECIFICATIONS</b>	<b>860HD</b>	<b>800HD</b>	<b>760HD</b>	<b>760LT</b>	<b>720LT</b>	<b>680LT</b>
BLADE WIDTH	2600	2450	2300	2300	2200	2050
BLADE WIDTH (angled)	2340	2130	1980	1980	2030	1880
BLADE HEIGHT	790	790	790	740	600	550
BLADE THICKNESS	2,0	2,0	2,0	2,0	1,5	1,5
REINFORCEMENT RIBS	6	6	6	4	4	4
CUTTING EDGE (1080)	13 x 152	13 x 152	13 x 152	10 x 152	6 x 127	6 x 127
BLADE TORQUE BOX	YES	YES	YES	YES	YES	YES
TRIP SPRINGS	4	4	4	3	4	4
BLADE SHOES	CAST IRON	CAST IRON	CAST IRON	STEEL	STEEL	STEEL
HITCH SYSTEM	POWER HITCH	POWER HITCH	POWER HITCH	POWER HITCH	POWER HITCH	POWER HITCH
PLOW WEIGHT (kg)*	347	340	325	250	170	160

\*Plow weight does not include undercarriage mount.



P.O. Box 245038  
Milwaukee, WI 53224-9538  
[www.blizzardplows.com](http://www.blizzardplows.com)

A DIVISION OF DOUGLAS DYNAMICS, L.L.C.

Blizzard, Power Plow, WidePass, and BucketBlade are trademarks of Blizzard Corporation. Blizzard and Blizzard Power Plow are registered in the United States Patent and Trademark Office. All other trademarks and registered trademarks are property of their respective owners. Blizzard Snowplows are protected by one or more of the following United States Patents: 5,638,618; 6,278,669; 6,392,727; 6,408,549; 6,412,199; 6,422,877 and 6,615,513. Other United States and foreign patents pending.

Copyright © 2007 Douglas Dynamics, L.L.C. All rights reserved. Made in U.S.A. and printed in Finland.